

FIG. 1

FIG. 1

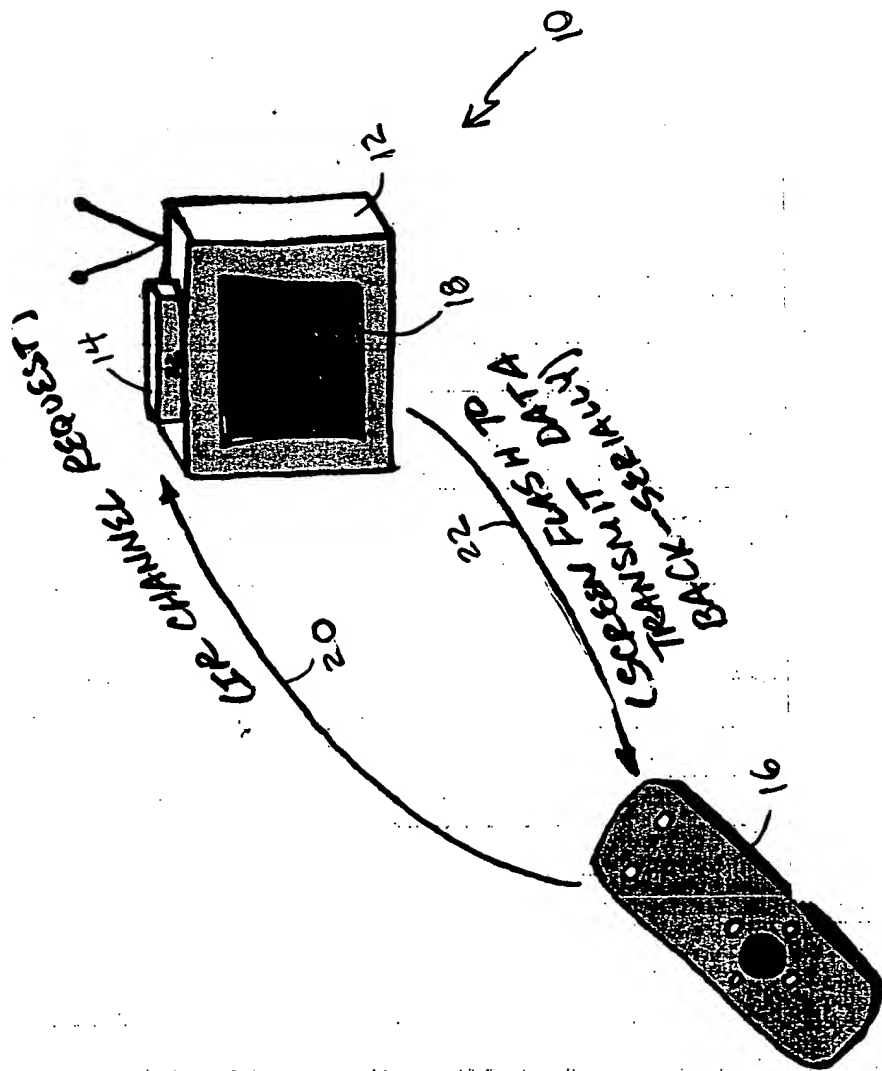


Fig. 2


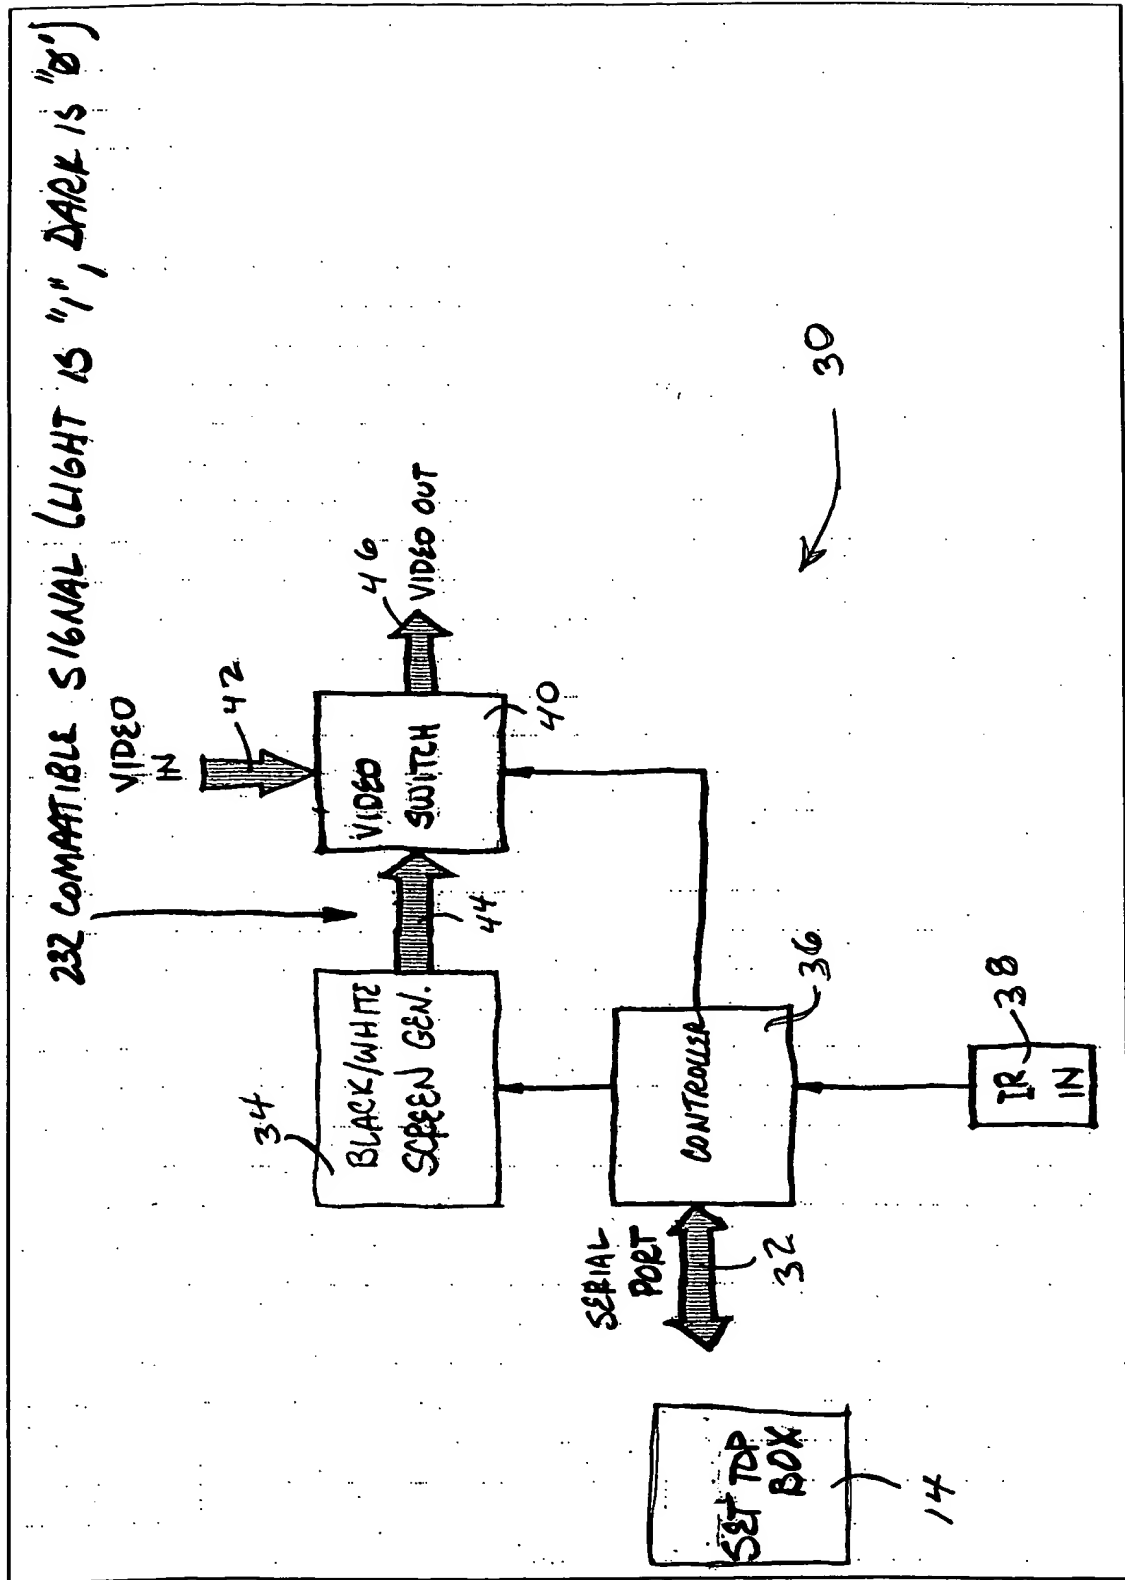


Fig. 3

232 COMPATIBLE SIGNAL

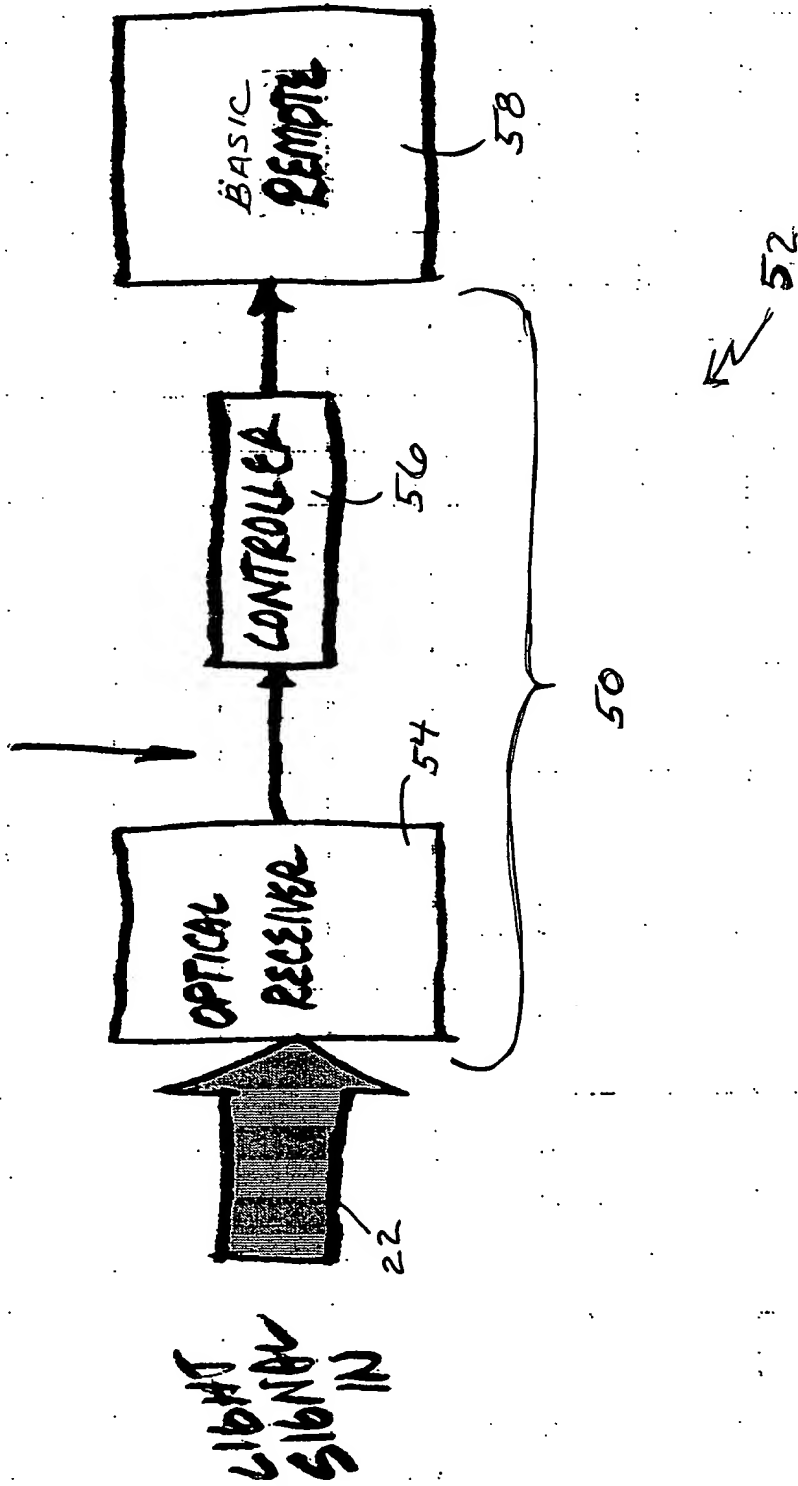

RECEIVER SCHEMATIC

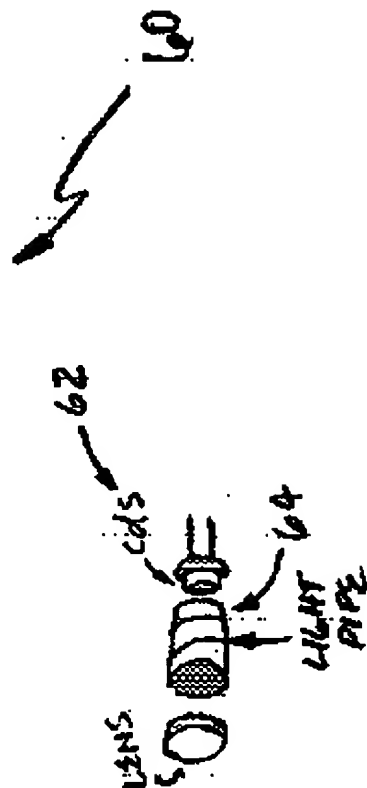
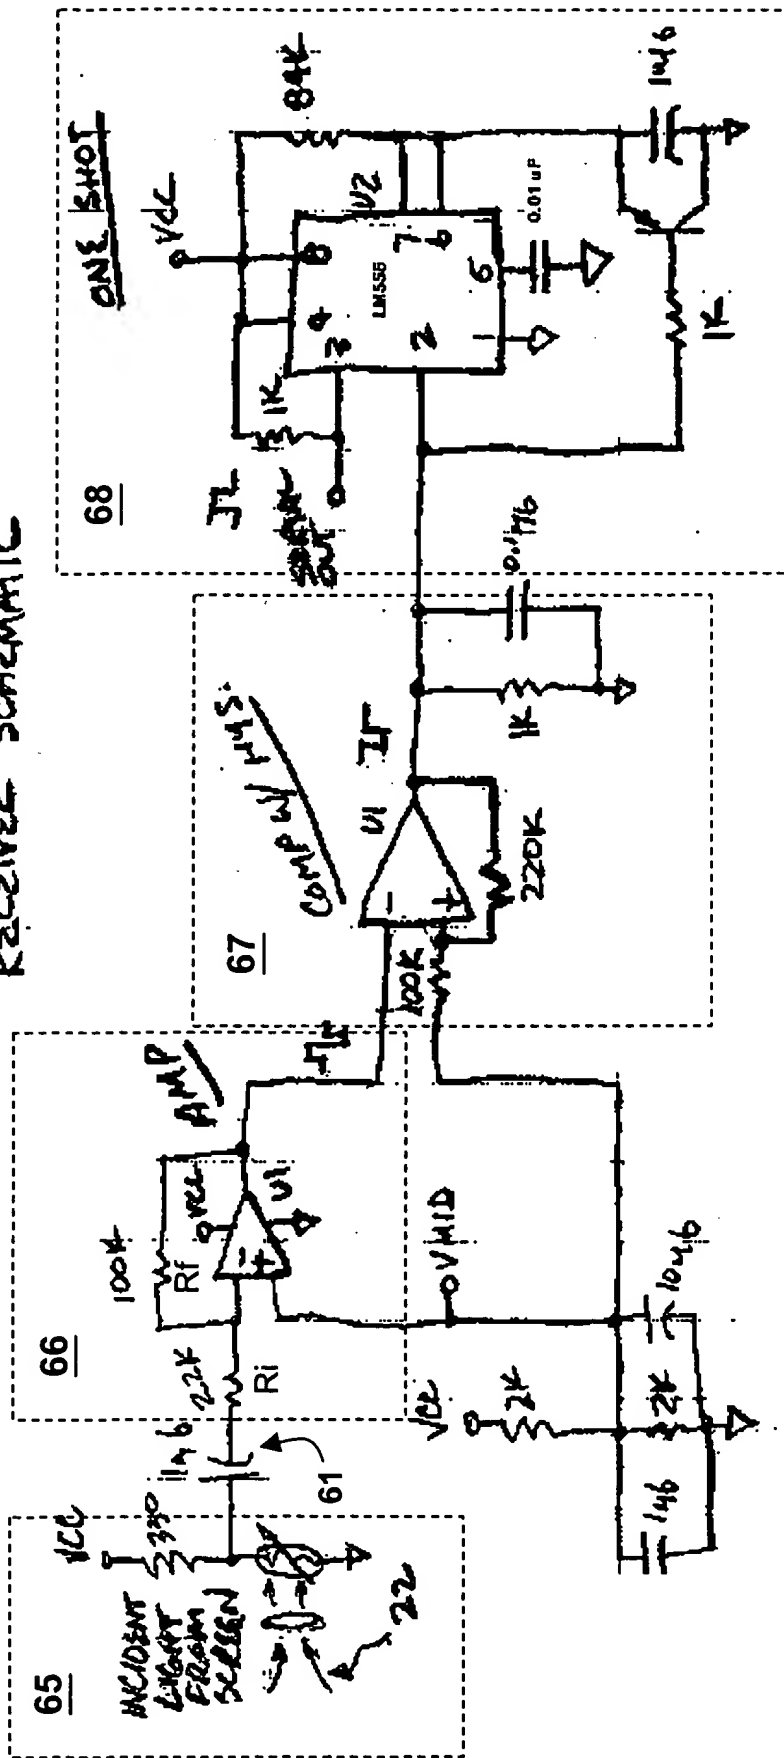


FIGURE 5

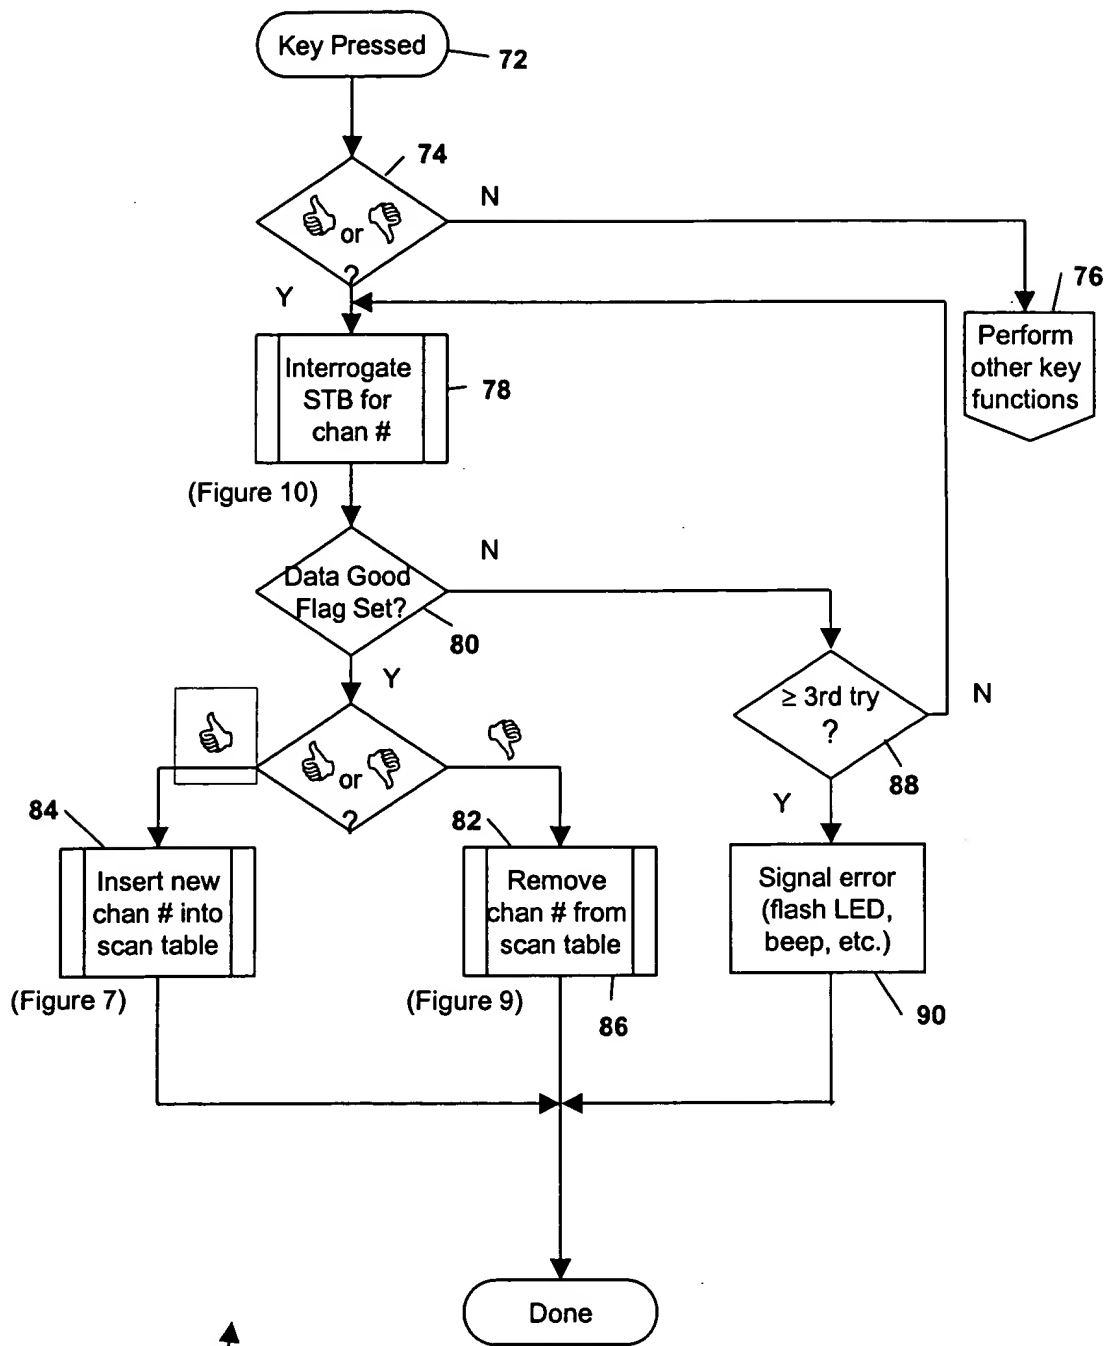


FIGURE 6

0967069.092701

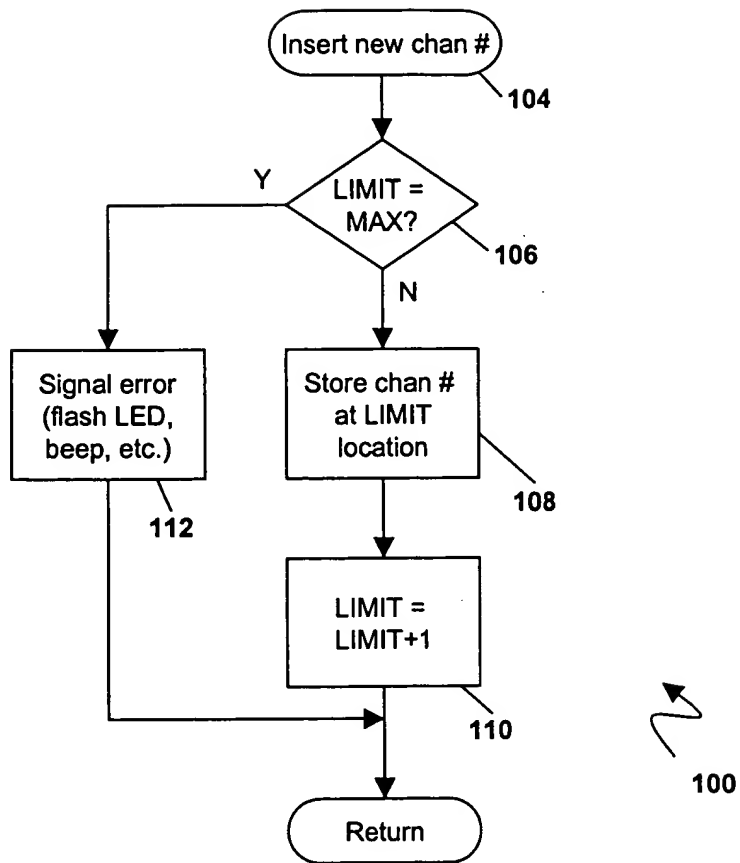


FIGURE 7

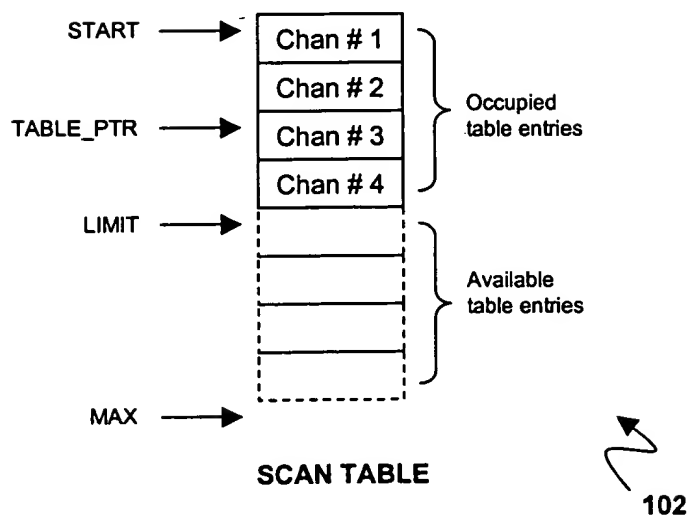


FIGURE 8

09967069.092701
FD220"6929660

120 ↻


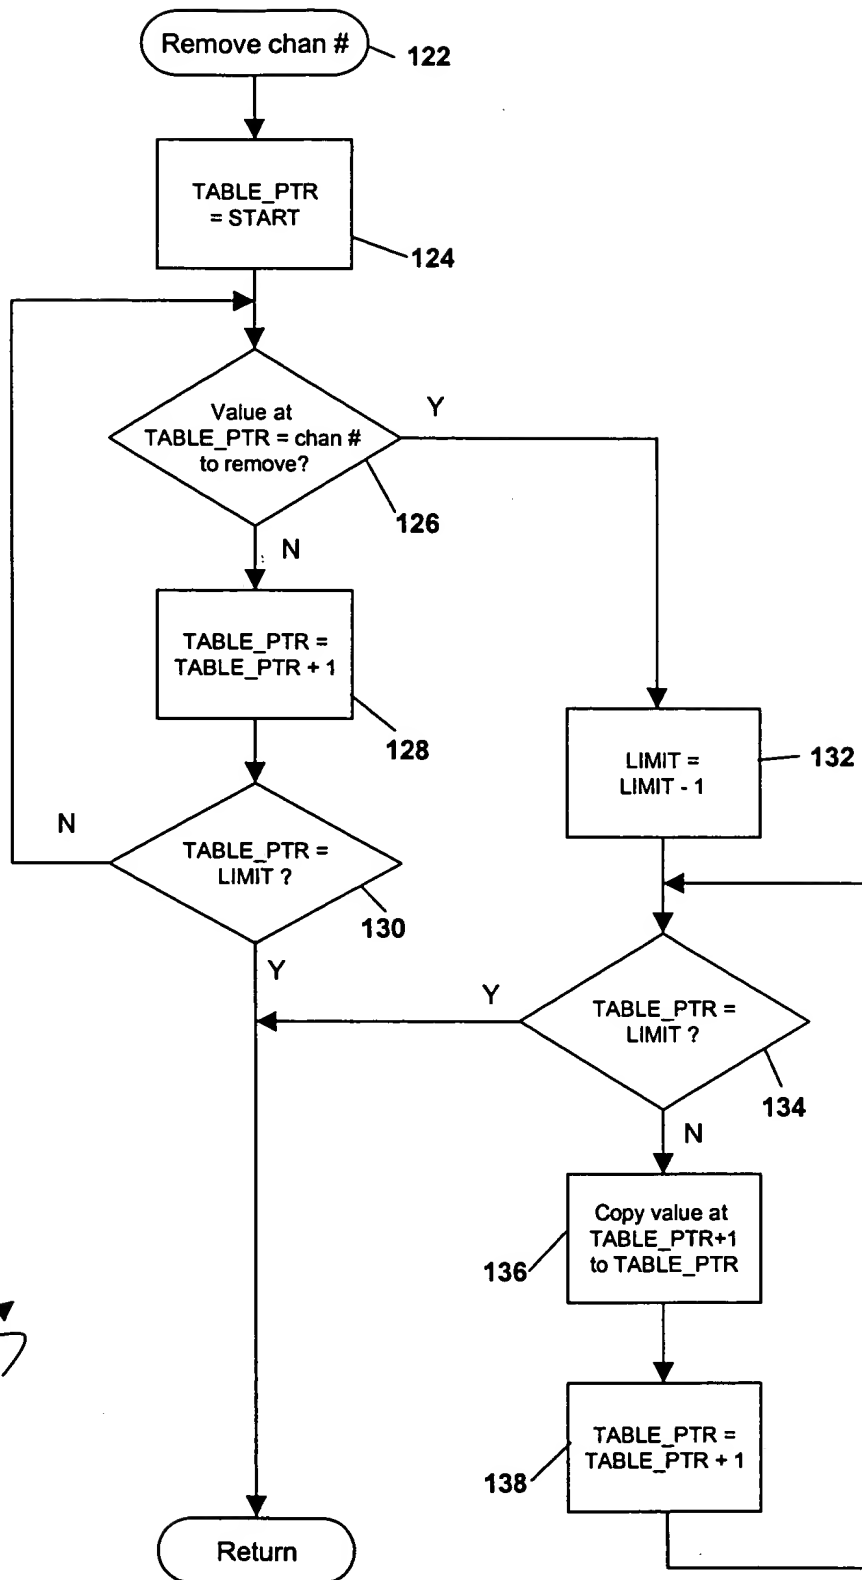


FIGURE 9

STB

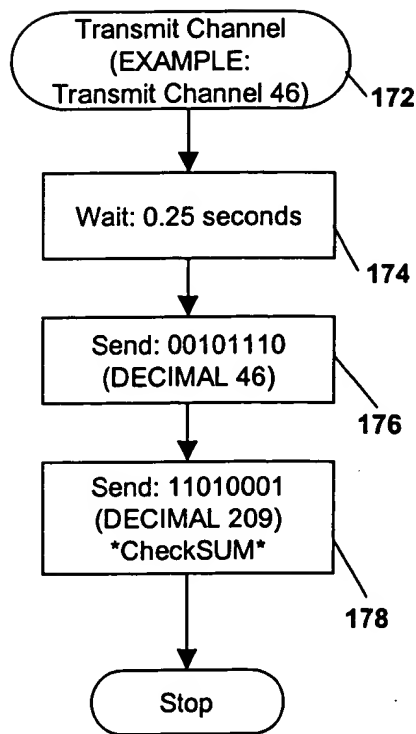

NOTES:

Data Transmitted has the following format: 16 bit packet comprising an 8-bit data field (offers the ability to send 0-255 for channel information) followed by the data inverted as a checksum.

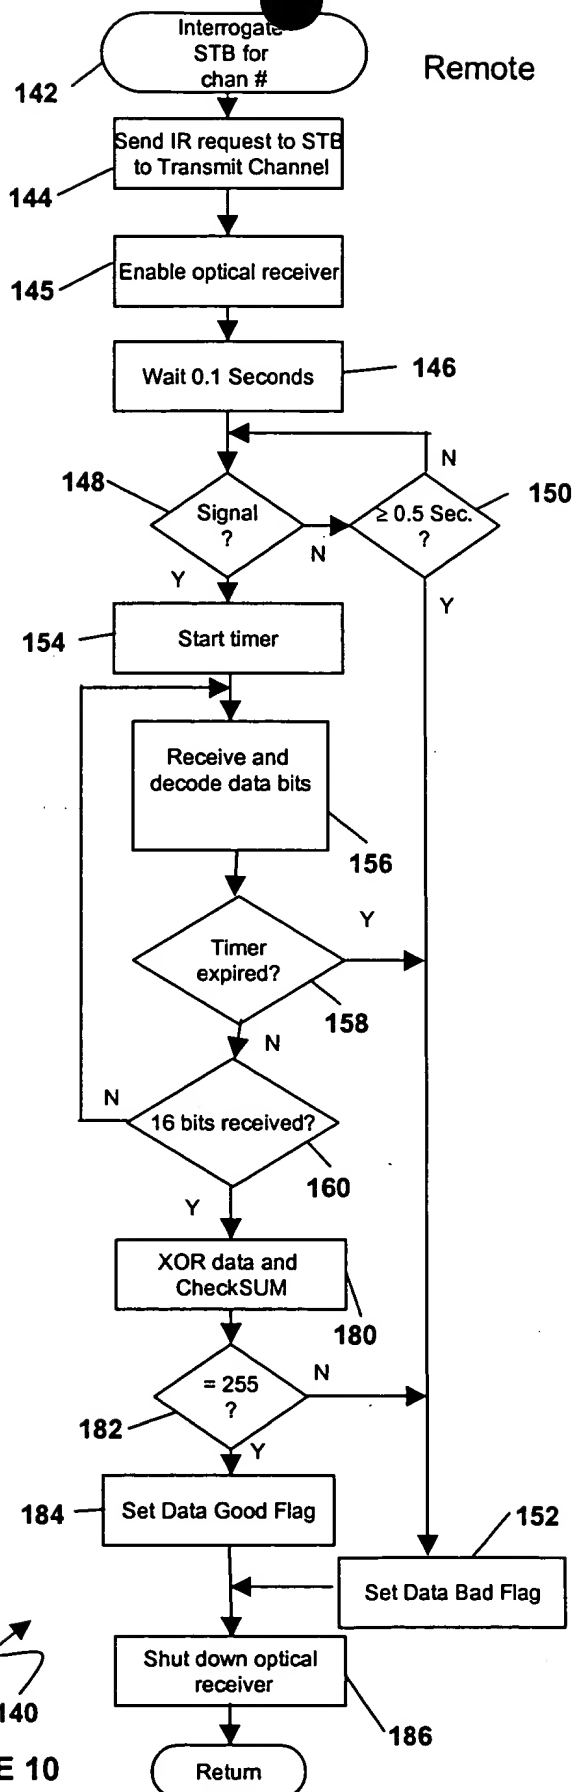


FIGURE 10